

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 886 206 A2

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
23.12.1998 Bulletin 1998/52

(51) Int. Cl.<sup>6</sup>: G06F 3/12

(21) Application number: 98109777.7

(22) Date of filing: 28.05.1998

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI

(72) Inventor: Gase, Stephen T.  
Boise, Idaho 83709 (US)

(74) Representative:  
Schoppe, Fritz, Dipl.-Ing.  
Schoppe & Zimmermann  
Patentanwälte  
Postfach 71 08 67  
81458 München (DE)

(30) Priority: 18.06.1997 US 879247

(71) Applicant:  
Hewlett-Packard Company  
Palo Alto, California 94304 (US)

## (54) Network printer with remote print queue control procedure

(57) The method of the invention enables remote control of a print queue (28) in a network printer (14) which receives print jobs over the Internet from plural client processors (10,12). The network printer (14) includes a server procedure (24) which enables transfer of files from the network printer (14) over the network and a browser procedure (26) which enables retrieval of files from client processors (10,12) over the network. The method includes the steps of: establishing a queue (28) of received print job identifiers; employing the server procedure (24) to provide a first file to a client processor (10,12) to enable the client processor (10,12) to transmit a status request concerning the print queue; receiving a message including the status request and transmitting, in response, a second file with queue data to the client processor (10,12), the second file further including queue alteration choices; receiving a response message from the client processor (10,12) with at least one queue alteration value; and altering the queue (28) accordingly. The method further includes the step of responding to a received URL from a scanner (16), by employing the browser procedure (26) to retrieve a text file identified by the URL.

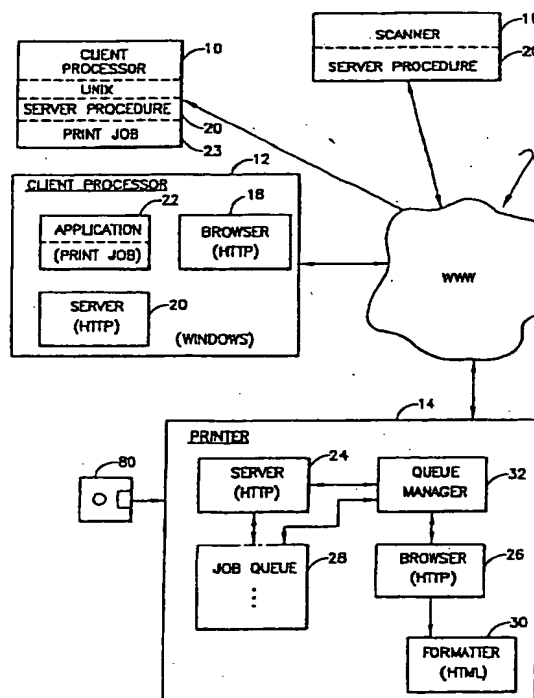


FIG.1

Best Available Copy

## Description

### FIELD OF THE INVENTION

This invention relates to printers that are particularly adapted to being connected to an Internet port and, more particularly, to a network printer which includes procedures that enable remote client processors to control print jobs that are queued for printing on the network printer.

### BACKGROUND OF THE INVENTION

The Internet and its associated worldwide web (WWW) are well-known and established communication networks. Increasingly, business applications are employing the worldwide web to transfer print jobs from client processors to network printers that are remotely located. A significant feature of the worldwide web is that it offers a common interface which enables computing devices that are controlled by different operating system platforms to communicate and to be understood by each other. This communication capability arises as a result of each of the operating system platforms having program modules which enable the devices to communicate via the common messaging protocol used over the worldwide web.

That protocol is termed the "HyperText Transfer Protocol" or HTTP. HTTP provides a way for WWW clients and servers to communicate, primarily through the exchange of messages that are brief and direct. HTTP employs specific message categories, i.e.: a "connection"; a "request"; a "response" and a "close". A connection is a message which occurs as a client tries to connect to a specific web server. As will be understood from the description below, a network printer which incorporates the invention operates as a web server and is accessed by client processors.

A request is when a client processor asks for a web resource it is looking for. Such request includes the protocol to be used, the name of the object being sought (i.e. its universal resource locator or URL), and information about how the server should respond to the client processor.

A response is a server's message which responds in the manner requested by the client processor and delivers the requested data. A close occurs after the information has been transferred in response to the request. The connection can then be reopened with another request, for example, by clicking on a link in a current web page.

An Internet printing system, recently announced by the Pipeline Corporation (see "The Hard-Copy Observer", pages 45, 46, March 1997), describes a network printer that includes functions which enable a URL of a print job to be received. The printer's home page includes a field that allows a user to enter URLs of desired pages to be printed. The printer includes sched-

uling software which allows a user to program the printer to periodically access a prescribed list of web sites and to automatically print the pages it finds there. The system also enables the printer to be programmed to retrieve and print pages that are hyperlinked to an original document, down a specified number of link levels.

Because many client processors can access network printers over the worldwide web, such a printer must have an ability to establish a queue for received print jobs so as to enable such print jobs to be handled in an orderly manner. It is desirable, however, that client processors have an ability to view the printer's print queue and, to access information regarding the status of each print job on the print queue. Further it is desirable that a client processor have an ability, if authorized, to alter the print queue. Such a capability will enable the print queue to be a "universal queue" that is accessible by any number of client processors and will enable each client processor to render an informed decision regarding whether it wishes to use the particular network printer. Also, the capability will provide an ability to remotely modify the print queue, in accordance with preassigned priority client queue management rights.

Accordingly, it is an object of this invention to provide a network printer with a capability to establish a universal print queue.

It is another object of this invention to provide a network printer with an ability to report print queue status data to client processors.

It is yet another object of this invention to provide a network printer with an ability to respond to HTTP-configured messages and to both report print queue status and to retrieve print jobs in response thereto.

It is yet another object of this invention to enable a scanner device attached to the WWW to provide a URL indicator to a printer and for the printer to respond by accessing a scanned image.

### SUMMARY OF THE INVENTION

The method of the invention enables remote control of a print queue in a network printer which receives print jobs over the Internet from plural client processors. The network printer includes a server procedure which enables transfer of files from the network printer over the network and a browser procedure which enables retrieval of files from client processors over the network. The method includes the steps of: establishing a queue of received print job identifiers; employing the server procedure to provide a first file to a client processor to enable the client processor to transmit a status request concerning the print queue; receiving a message including the status request and transmitting, in response, a second file with queue data to the client processor, the second file further including queue alteration choices; receiving a response message from the client processor with at least one queue alteration

value; and altering the queue accordingly. The method further includes the step of responding to a received URL from a scanner, by employing the browser procedure to retrieve a print job from the scanner that is identified by the URL.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a schematic system diagram illustrating the relationship of a printer incorporating the invention to plural client processors and a scanner, all of which communicate over the WWW.

Fig. 2 illustrates a home page provided by the printer of Fig. 1, in response to a message from a client processor.

Fig. 3 is a further printer web page illustrating a queue of print jobs awaiting printing in the printer of Fig. 1.

Fig. 4 is a further printer web page illustrating job detail of any selected job listed in the print queue of Fig. 3, and further showing various queue alteration actions which are available to a client processor.

#### DETAILED DESCRIPTION OF THE INVENTION

Turning to Fig. 1, plural client processors 10, 12... etc. are coupled to the WWW and are thus able to communicate with a network printer 14. A scanner 16 is also coupled to the WWW and communicates with network printer 14. Each client processor (i.e., 10, 12...) includes a browser procedure 18 and a server procedure 20. Scanner 16 includes only a server procedure 20. Further, each client processor includes an application 22 which may have a print job ready for submission to printer 14. A client processor (e.g., 12) may wish to have a print job 23 that is present in another client processor (e.g., 10) submitted to printer 14 for printing. In the alternative, a user at a client processor may wish to view the status of print jobs queued on printer 14 and to alter the queue status of one or more such print jobs.

Accordingly, printer 14 is also provided with a server procedure 24 and a browser procedure 26. Server procedure 24 provides a print job management function for printer 14 and is further used to respond to request messages from one or more client processors. Browser procedure 26 enables printer 14 to respond to a received URL by accessing, via the WWW, the print job designated by the URL. The URL may designate a print job residing at any client, whether it is the client which originated the message with the URL or any other client. The responses transmitted by browser 26 are formatted in a formatter module 30, using the HTML or any other formatting procedure.

Printer 14 further includes a job queue 28 which lists the URL's of received print jobs. Upon a URL being reached on job queue 28, printer 14 causes browser 26 to transmit a request to the client processor wherein the specific print job corresponding to the URL is located.

The client processor then responds with the text of the print job, which text is then printed by printer 14.

Job queue 28 is managed by a queue manager 32 which maintains status data and controls the position of each of the URLs listed on job queue 28. Queue manager 32 is further enabled to rearrange the listed URLs in accordance with received commands that appear on a web page transmitted from a client processor.

Server procedure 24 maintains a "home page" which is shown in Fig. 2. The home page is the default page which is transmitted by server 24 to an inquiring client processor that has transmitted a request to printer 14. The home page provides data regarding the properties of printer 14, such as its WWW address, capabilities, whether it is on-line, etc.. The home page also provides further virtual buttons 40-44 which enable a linking to other pages and provide a capability to cause the printer to: respond with its properties (button 40); come on-line (button 41); provide a listing of jobs that are present on job queue 28 (button 42); provide a diagnostic procedure for remotely diagnosing a problem within printer 14 (button 43); and provide further configuration information (button 44).

Upon receiving the home page from printer 14, a user at a client processor may wish to view the jobs that are presently listed on job queue 28. To obtain a web page illustrating the jobs queued on job queue 28, the user clicks on job's button 41 which causes a request message to be transmitted back to printer 14, with a code indicating a request to provide the "job's list" page shown in Fig. 3.

The job's list page includes an identifier for each job (e.g., the job's URL); a description of the job; the status of the job (i.e., is it printing, printed, queued, etc.) and the owner of the job. At the bottom of the job's list page is a virtual button 50 which enables the user at the client processor to access further printer pages. If virtual "select job" button 50 is selected by a mouse click and then a cursor is placed at a job entry, followed by a mouse click, a "job detail" page is produced.

More specifically, upon a user at a client processor selecting a particular job in the job's list page, a request message is sent to printer 14 which is received by server 24. Server 24, in turn, queries queue manager 32 for details of the selected job. A job detail page is then constructed, as shown in Fig. 4, with details of the selected job. The job detail page is then dispatched as a response message to the originating client processor.

The job detail page enables the originating client processor to exert control over job queue 28 and the details of the specific job shown in the received job detail page. More specifically, by clicking one of the entries on the job detail page, an entry can be highlighted and altered. Thus, as shown in Fig. 4, not only is the identity of the job indicated, but its state; the number of pages printed; the URL of the job; the job description; the owner; and the number of copies required. At the bottom of the job detail page are a number of virtual but-

tons which enable a job entry parameter to be altered.

Change button 60 enables the alteration of a highlighted field on the page that has been previously selected by the user at the client processor. For instance, if it is desired to change the number of copies, the "copies" line is highlighted, followed by a clicking on "change" button 60, after which the number of copies can be altered. Change button 60 may also be used to modify the queue position of a job listed on job queue 28. To accomplish such a unilateral change in position, the client processor must have been previously provided with an assigned priority level which enables its print jobs to enjoy a higher priority status than other print jobs on job queue 28 that are to be "pushed down" in favor of the client processor's print job. In such case, change button 60 enables a print job from the higher priority client processor to be repositioned on job queue 28 to a position just prior to a print job of equal or higher priority, as the case may be.

By clicking on "cancel" button 62, a selected job can be canceled in its entirety. By clicking on "hold" button 64, the position on job queue 28 of a selected job will not be advanced, notwithstanding the completion of jobs higher up on the queue. The clicking of "resume" button 66 negates the hold status and enables a continued movement of the print job on job queue 28. "Add" button 68 enables a message to be sent to printer 14 to provide a blank "Printer job detail" page, which will enable a new job to be entered by the user.

Buttons 70 and 72 enable messages to be transmitted to printer 14 to cause a re-transmission of either a last transmitted web page or the printer's home page.

Returning to Fig. 1, scanner 16 is also provided with a server procedure 20 which enables scanner 16 to transmit a URL of a scanned document text file to a printer 14. Such transmission occurs after scanner 16 has scanned and stored a document and the document is now to be printed. Upon receiving the URL, printer 14 causes browser procedure 26 to transmit a request message to scanner 16 which requests that the text file be appended to the response message and re-transmitted back to printer 14. Accordingly, scanner 16 formats the response page from printer 14 by appending the scanned document text file and transmitting the page and text file to printer 14 for printing. Accordingly, printer 14 executes a file "pull" action upon the data stored in scanner 16, thereby enabling the text file to be downloaded to printer 14 and eventually printed.

While the procedures which control printer 14, i.e., server procedure 24, browser procedure 26, formatter procedure 30 and print queue manager 32 have been described as already having been loaded onto printer 14, one skilled in the art will realize that such procedures are initially loaded by insertion of one or more memory disks 80 (Fig. 1) into a disk drive read/write assembly (not shown) associated with printer 14. Accordingly, the invention encompasses not only the above-described software procedures when incorpo-

rated into printer 14, but also when such procedures are incorporated onto a magnetic disk which is used to control various instrumentalities within printer 14.

It should be understood that the foregoing description is only illustrative of the invention. Various alternatives and modifications can be devised by those skilled in the art without departing from the invention. Accordingly, the present invention is intended to embrace all such alternatives, modifications and variances which fall within the scope of the appended claims.

## Claims

1. A method for enabling control of a network printer (14) which receives print jobs over a network from plural client processors (10,12), said network printer (14) including a server procedure (24) for enabling transfer of files from said network printer (14) over said network and a browser procedure (26) for enabling retrieval of files to said network printer (14) over said network, said method comprising the steps of:
  - a) establishing a queue (28) of received print job identifiers;
  - b) employing said server procedure (24) to provide a first file to a client processor (10,12) to enable said client processor (10,12) to transmit a status message concerning said queue (28);
  - c) receiving said status message and enabling said server procedure (24) to transmit a response comprising a second file with queue data to said client processor (10,12), said second file further including queue alteration choices; and
  - d) receiving a further response message from said client processor (10,12) with at least one queue alteration value and altering said queue (28) accordingly.
2. The method as recited in claim 1, wherein said further response message includes an identifier of a print job (23), said method comprising the added step of:
  - e) employing said browser procedure (26) to retrieve said print job (23).
3. The method as recited in claim 1, wherein said further response message comprises a list of print jobs on said queue (28) and status indications for each said print job.
4. The method as recited in claim 1, wherein said status indications comprise at least one of: printing status, print job owner, order of jobs to print and expected time to print.

5. The method as recited in claim 1, wherein said status indications comprise at least one of: printing status, print job owner, order of jobs to print and expected time to print.
6. The method as recited in claim 1, wherein said first file and second file are Web pages that are configured in accordance with a HyperText Markup Language.
7. The method as recited in claim 1, wherein said first file and second file are each identified by a Universal Resource Locator identifier.
8. The method as recited in claim 1, wherein said server procedure (24) and browser procedure (26) operate in accordance with a Hypertext Transfer Protocol.
9. A memory media (80) including procedures for controlling a network printer (14) which receives print jobs over a network from plural client processors (10,12), said network printer (14) including a server procedure (24) for enabling transfer of files from said network printer (14) over said network and a browser procedure (26) for enabling retrieval of files to said network printer (14) over said network, said memory media (80) comprising:
  - a) means for controlling said network printer (14) to establish a queue (28) of received print job identifiers;
  - b) means for controlling said network printer (14) to employ said server procedure (24) to provide a first file to a client processor (10,12) to enable said client processor (10,12) to transmit a status message concerning said queue (28);
  - c) means for controlling said network printer (14) to receive said status message and to enable said server procedure (24) to transmit a response comprising a second file with queue data to said client processor (10,12), said second file further including queue alteration choices; and
  - d) means for controlling said network printer (14) to receive a further response message from said client processor (10,12) with at least one queue alteration value and to alter said queue (28) accordingly.
10. The memory media (80) as recited in claim 9, wherein said further response message includes an identifier of a print job, said memory media (80) further comprising:
  - e) means for controlling said network printer (14) to employ said browser procedure (26) to

retrieve said print job.

11. The memory media (80) as recited in claim 9, wherein said further response message comprises a list of print jobs on said queue (28) and status indications for each said print job.
12. The memory media (80) as recited in claim 9, wherein said status indications comprise at least one of: printing status, print job owner, order of jobs to print and expected time to print.
13. The memory media (80) as recited in claim 9, wherein said queue alteration choices for print jobs listed on said queue (28) comprise at least one of: deleting a print job, reordering a print job, delaying a print job, resuming a print job and changing attributes of a print job.
14. The memory media (80) as recited in claim 9, wherein said first file and second file are Web pages that are configured in accordance with a HyperText Markup Language.
15. The memory media (80) as recited in claim 9, wherein said first file and second file are each identified by a Universal Resource Locator identifier.
16. The memory media (80) as recited in claim 9, wherein said server procedure (24) and browser procedure (26) operate in accordance with a Hypertext Transfer Protocol.
17. A method for enabling control of a network printer (14) which receives print jobs over a network from a document scanner (16), said document scanner (16) including a server procedure (20) for enabling transfer of a Universal Resource Locator (URL) over said network, said network printer (14) including a browser procedure (26) for enabling retrieval of files to said network printer (14) over said network, said method comprising the steps of:
  - a) Receiving a URL designating a scanned document file from said document scanner (16);
  - b) employing said browser procedure (26) to provide a Web page to said document scanner (16) to enable said document scanner (16) to configure and transmit a response which includes said scanned document file; and
  - c) receiving said response with said scanned document file and printing text from said scanned document file.

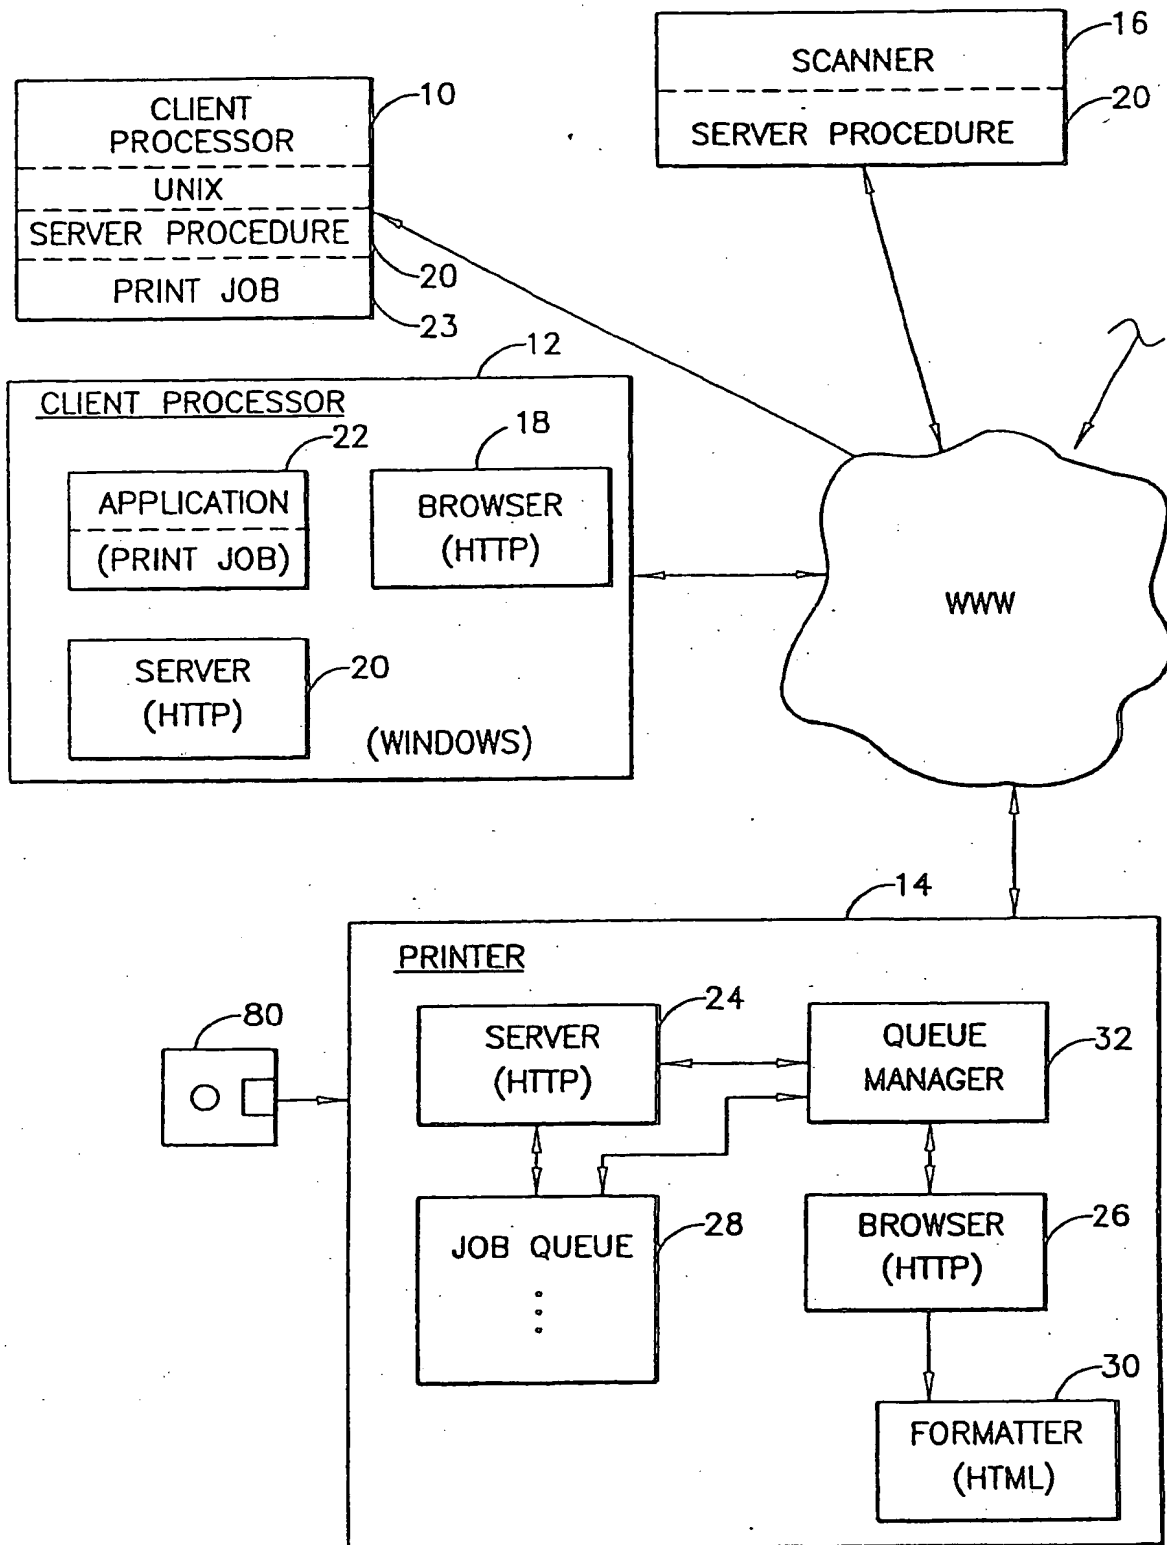


FIG. 1

PRINTER HOME PAGE

PRINTER TYPE:

ADDRESS:

CAPABILITIES:

ppm:

CONTRA LANGUAGE:

MEMORY:

⋮







FIG.2

PRINTER JOBS LIST

<u>ID</u>	<u>DESCRIPTION</u>	<u>STATUS</u>	<u>OWNER</u>
10	SPREAD SHEET	PRINTED	STEVE
11	LETTER	PRINTING	JEFF
15	DOCUMENT X	QUEUED	SAM
20	DOCUMENT Y	QUEUED	ROB



FIG.3

PRINTER JOB DETAIL

JOB: 15

STATUS: QUEUED

QUEUE POSITION: #3

PAGES PRINTED: NONE

URL: http: // ins / default: htm

JOB DESCRIPTION: DOCUMENT X

OWNER: SAM

COPIES: 2

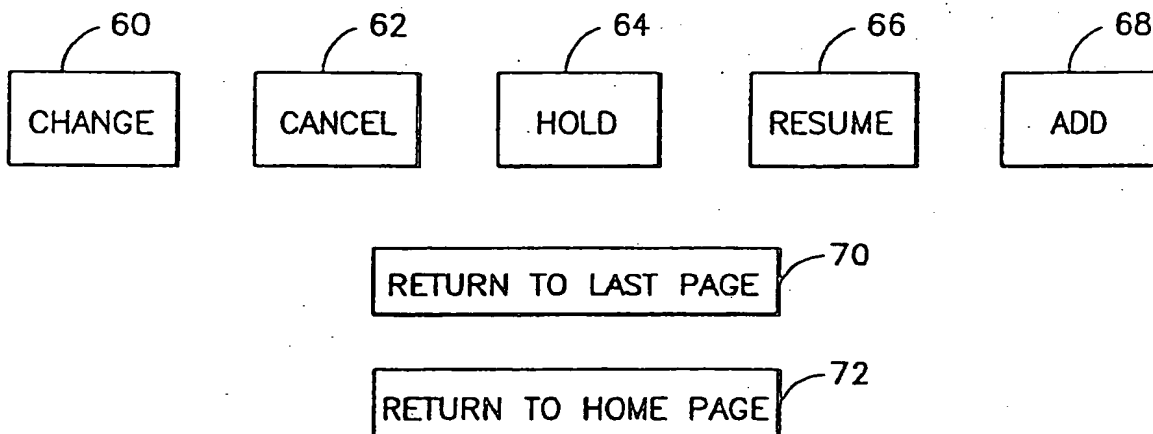


FIG.4



(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

EP 0 886 206 A3

(12)

## EUROPEAN PATENT APPLICATION

(88) Date of publication A3:  
14.08.2002 Bulletin 2002/33

(51) Int Cl.7: G06F 3/12

(43) Date of publication A2:  
23.12.1998 Bulletin 1998/52

(21) Application number: 98109777.7

(22) Date of filing: 28.05.1998

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI

(72) Inventor: Gase, Stephen T.  
Boise, Idaho 83709 (US)

(74) Representative: Schoppe, Fritz, Dipl.-Ing.  
Schoppe, Zimmermann & Stöckeler  
Patentanwälte  
Postfach 71 08 67  
81458 München (DE)

(30) Priority: 18.06.1997 US 879247

(71) Applicant: Hewlett-Packard Company,  
A Delaware Corporation  
Palo Alto, CA 94304 (US)

## (54) Network printer with remote print queue control procedure

(57) The method of the invention enables remote control of a print queue (28) in a network printer (14) which receives print jobs over the Internet from plural client processors (10,12). The network printer (14) includes a server procedure (24) which enables transfer of files from the network printer (14) over the network and a browser procedure (26) which enables retrieval of files from client processors (10,12) over the network. The method includes the steps of: establishing a queue (28) of received print job identifiers; employing the server procedure (24) to provide a first file to a client processor (10,12) to enable the client processor (10,12) to transmit a status request concerning the print queue; receiving a message including the status request and transmitting, in response, a second file with queue data to the client processor (10,12), the second file further including queue alteration choices; receiving a response message from the client processor (10,12) with at least one queue alteration value; and altering the queue (28) accordingly. The method further includes the step of responding to a received URL from a scanner (16), by employing the browser procedure (26) to retrieve a text file identified by the URL.

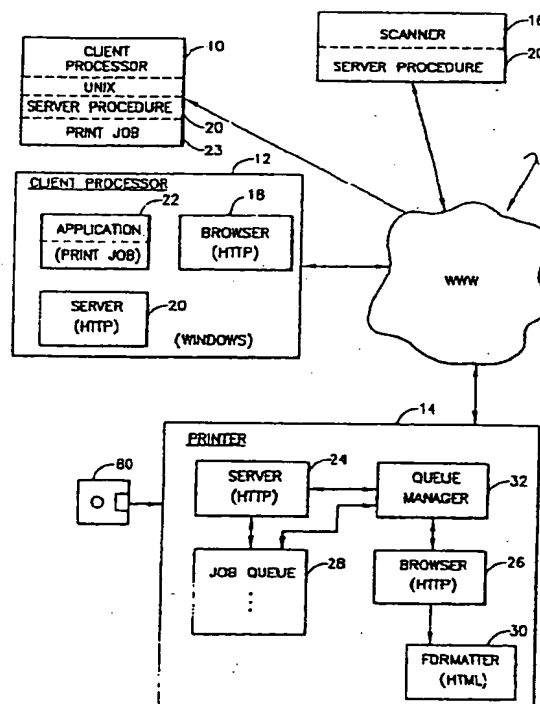


FIG.1

EP 0 886 206 A3



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 98 10 9777

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (InCL.8)
X	DE 44 22 619 A (HITACHI LTD) 5 January 1995 (1995-01-05) * the whole document *	1,3-5,9, 11-13,17	G06F3/12
A	WO 97 14054 A (SNAPTRACK INC) 17 April 1997 (1997-04-17) * the whole document *	1,2,9, 10,17	
			TECHNICAL FIELDS SEARCHED (InCL.8)
			G06F G06K
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 27 June 2002	Examiner Weiss, P
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons</p> <p>&amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1603 03.92 (P0401)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 98 10 9777

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

27-06-2002

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
DE 4422619	A	05-01-1995	DE	4422619 A1	05-01-1995
			JP	7072993 A	17-03-1995
WO 9714054	A	17-04-1997	US	6131067 A	10-10-2000
			AU	1131097 A	30-04-1997
			US	6185427 B1	06-02-2001
			WO	9714054 A1	17-04-1997
			AU	7396096 A	30-04-1997
			AU	7396596 A	30-04-1997
			AU	7397396 A	30-04-1997
			AU	7397596 A	30-04-1997
			AU	723615 B2	31-08-2000
			AU	7662096 A	30-04-1997
			BR	9611701 A	28-12-1999
			CA	2230841 A1	17-04-1997
			CN	1199468 A	18-11-1998
			CN	1211324 A	17-03-1999
			EP	0880713 A1	02-12-1998
			EP	0855041 A1	29-07-1998
			EP	0855039 A2	29-07-1998
			JP	11513787 T	24-11-1999
			JP	11513788 T	24-11-1999
			WO	9714053 A1	17-04-1997
			WO	9714055 A1	17-04-1997
			WO	9714049 A2	17-04-1997
			WO	9714056 A1	17-04-1997
			WO	9714057 A1	17-04-1997
			US	6064336 A	16-05-2000
			US	6259399 B1	10-07-2001
			US	6104340 A	15-08-2000
			US	6016119 A	18-01-2000
			US	6400314 B1	04-06-2002
			US	5874914 A	23-02-1999
			US	5663734 A	02-09-1997
			US	6133871 A	17-10-2000
			US	2001028321 A1	11-10-2001
			US	5781156 A	14-07-1998
			US	2002044087 A1	18-04-2002

EPO FORM P4459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**